


**Electro Katadyn EK-4**

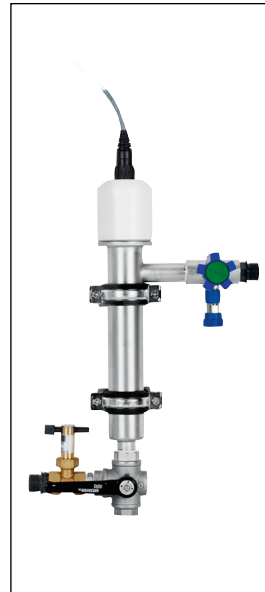

**PRODUCT SPECS**


Article No.: 7012311 EK-4 (> 99 µS/cm)  
 Article No.: 37000 Silver Anode  
 (1 Anode is included in Article: 7012311)  
 Technology: Silver Ions Ag+ through electrolytic process  
 Effect: Drinking Water preservation over long periods of time  
 Anodes: 1 piece  
 Flow rate: 20m<sup>3</sup>/h @ 0.02ppm Ag+ dosage in bypass configuration  
 Pressure: 1 to 6 bar  
 Capacity: up to 10'000m<sup>3</sup> @ 0.02ppm Ag+ dosage, depending on water quality  
 Connections: G 3/4" Inlet/Outlet  
 Material: 1.43 stainless steel  
 Supply Voltage: 230/120V 50/60Hz  
 Power: 40W  
 Weight: Approx. 16kg (dry)  
 Guarantee: 2 years

**FEATURES**

- High-quality stainless-steel equipment
- WRAS certified Anode
- Easy installation, setup and low maintenance
- High resolution color touch screen HMI with alarm history
- Fully remote controllable
- Operating- and alarm data storage on microSD card
- Minimum flow switch included


**Electro Katadyn EK-4**

**DIMENSION AND CONNECTION**

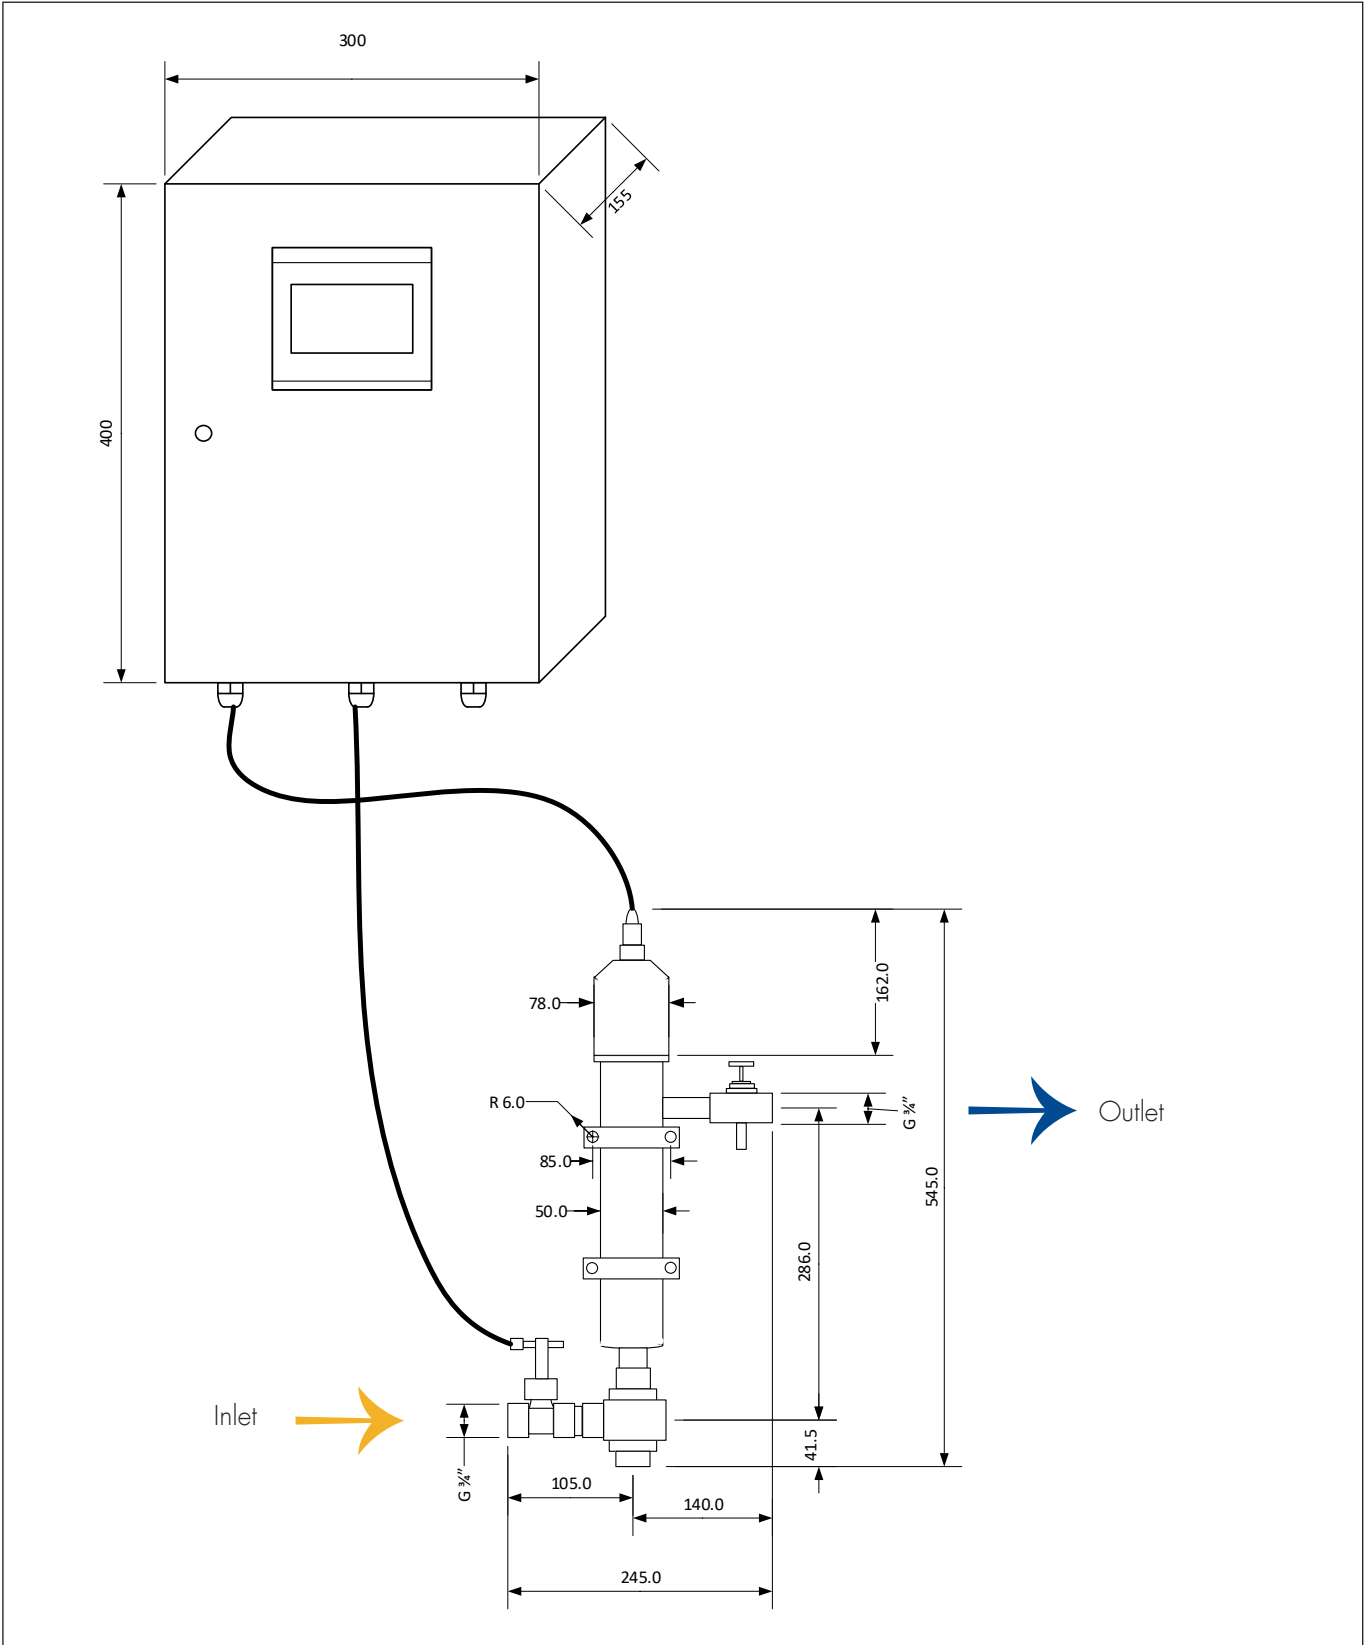

**Electro Katadyn EK-4**

TYPICAL BYPASS CONFIGURATION

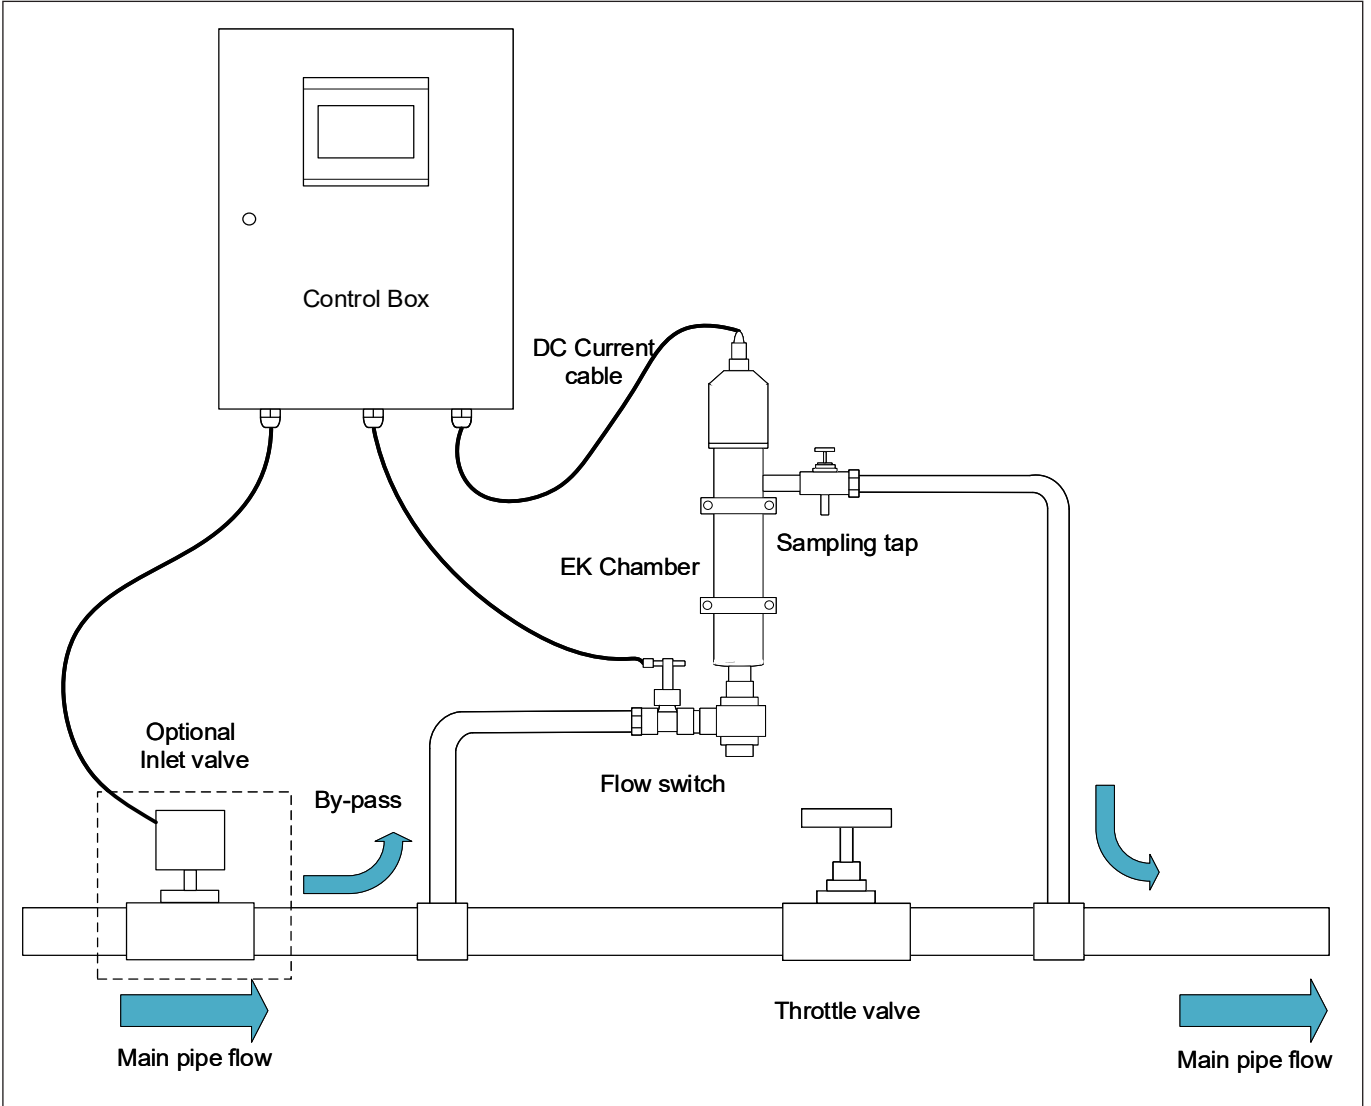

**Katadyn Products Inc.**  
 Pfäffikerstrasse 37 | 8310 Kempthal, Switzerland  
 Tel: +41 44 839 21 47 | Fax: +41 44 839 21 11  
 info@katadyn.com www.katadyn.com

Katadyn reserves the right to make changes to this fact sheet.  
 Version: 11.03.2020