

Electro Katadyn EK-X/24



PRODUCT SPECS


Article No.:	8020726 EK-X/24 ST (> 99 $\mu\text{S}/\text{cm}$)
Article No.:	8020727 EK-X/24 LC (< 99 $\mu\text{S}/\text{cm}$)
Article No.:	8020728 EK-X/24 SA (Tri-Clamp/El. polished)
Article No.:	37000 Silver Anode
Technology:	Silver Ions Ag+ through electrolytic process
Effect:	Drinking Water preservation over long periods of time
Anodes:	2, 3, 4 or 6 pieces
Flow rate:	20m ³ /h per Anode @ 0.02ppm Ag+ dosage in bypass configuration
Pressure:	1 to 6 bar
Capacity:	up to 10'000m ³ per Anode @ 0.02ppm Ag+ dosage, depending on water quality
Connections:	G1" Inlet/Outlet
Material:	1.43 stainless steel
Supply Voltage:	230/120V 50/60Hz
Power:	40W
Weight:	Approx. 28kg (dry) with 6 Anodes
Guarantee:	2 years

FEATURES

- High-quality stainless-steel equipment
- WRAS certified Anode
- Easy installation, setup and low maintenance
- High resolution color touch screen HMI with alarm history
- Fully remote controllable
- Operating- and alarm data storage on microSD card
- Minimum flow switch included


Electro Katadyn EK-X/24

DIMENSION AND CONNECTION

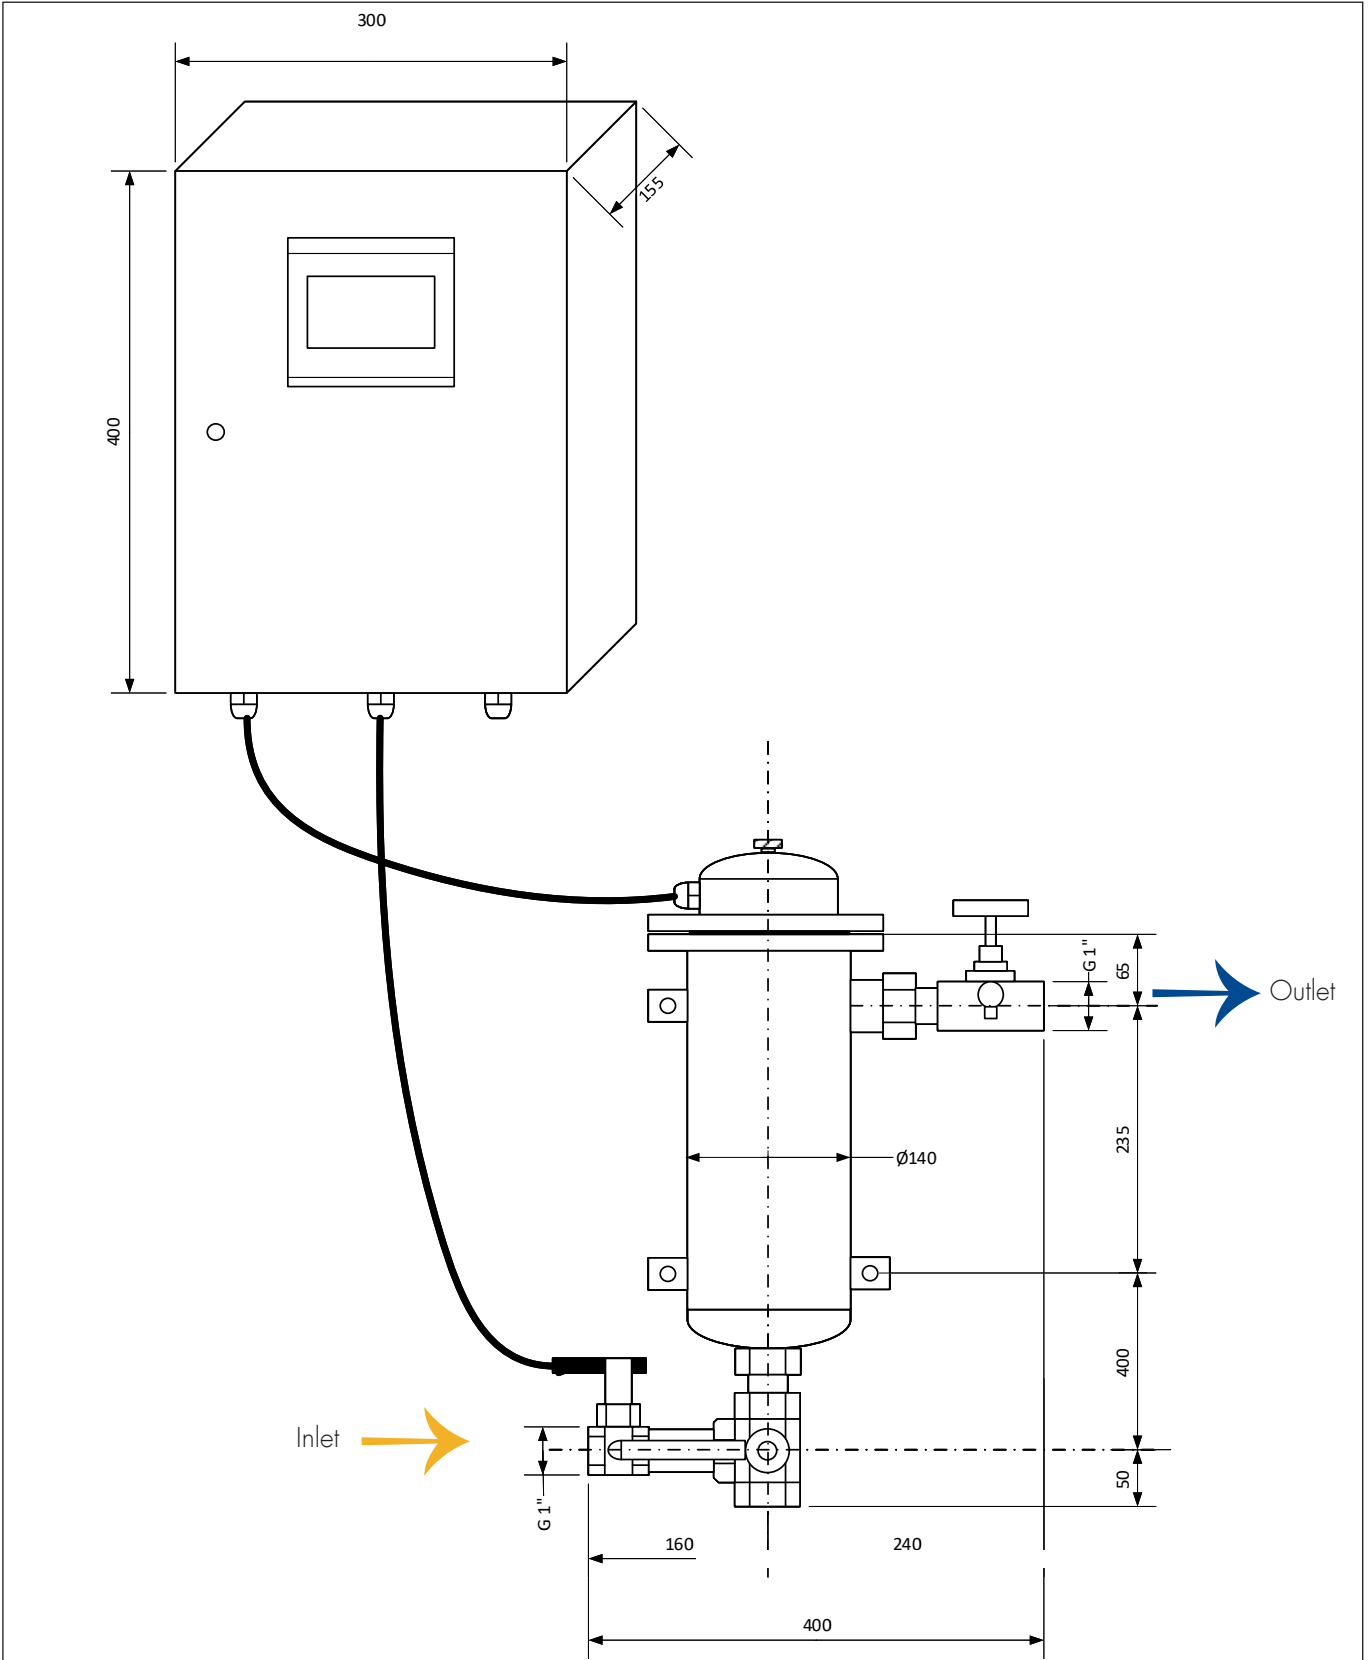

Electro Katadyn EK-X/24

TYPICAL BYPASS CONFIGURATION

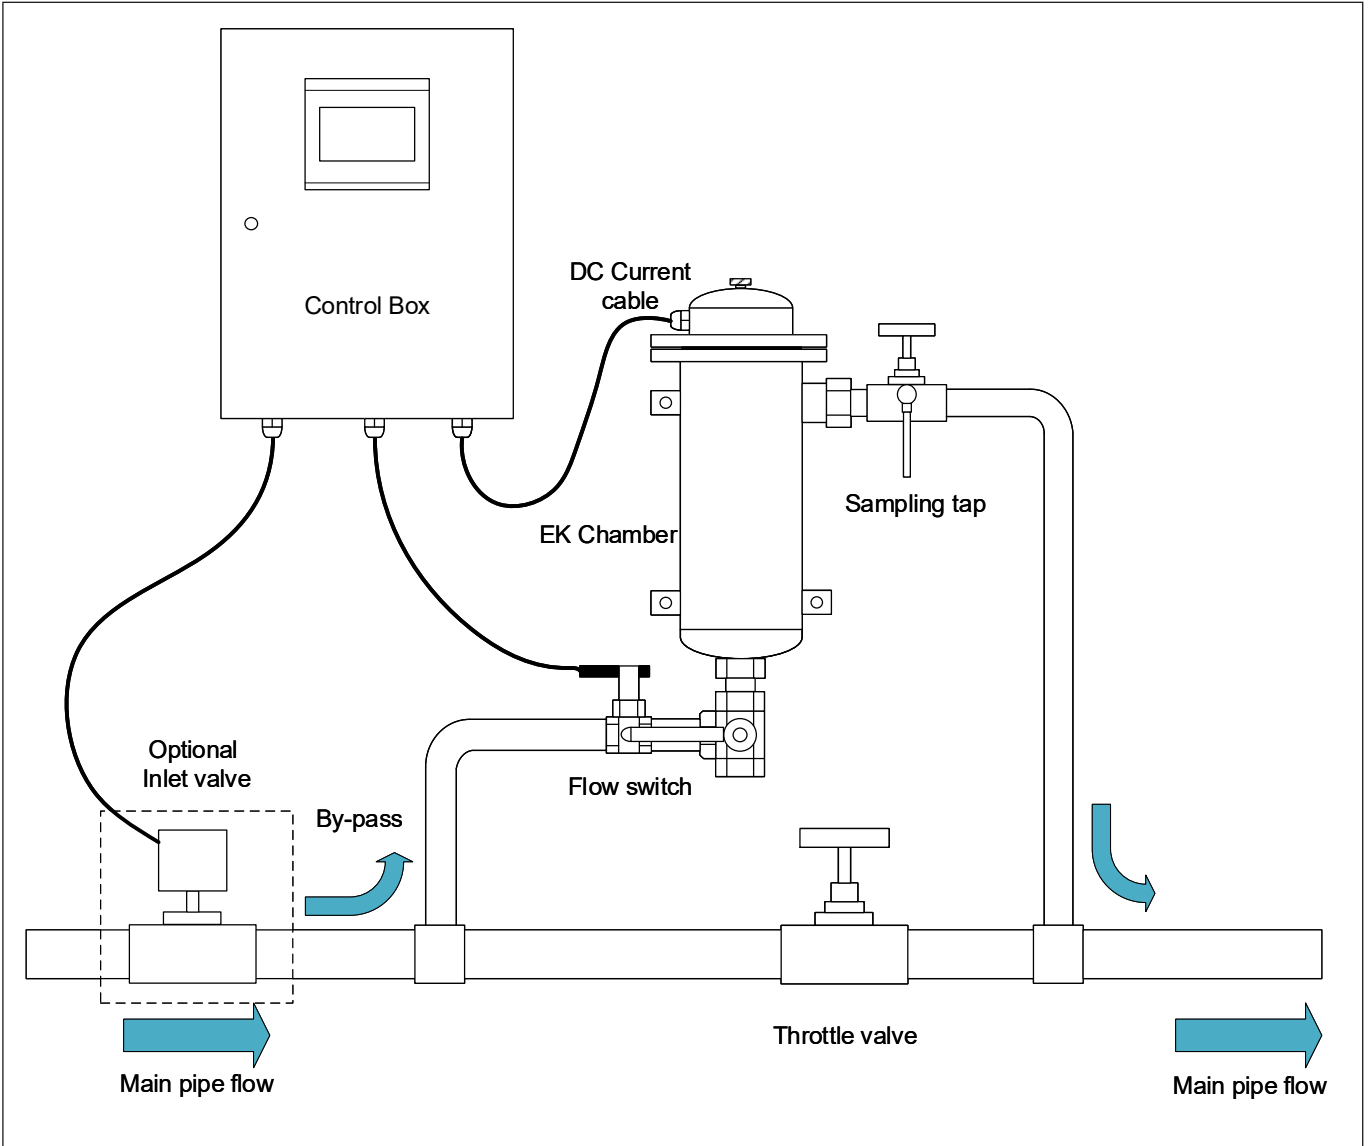

Katadyn Products Inc.
 Pfäffikerstrasse 37 | 8310 Kempthal, Switzerland
 Tel: +41 44 839 21 47 | Fax: +41 44 839 21 11
 info@katadyn.com www.katadyn.com

Katadyn reserves the right to make changes to this fact sheet.
 Version: 11.03.2020