

KATADYN MF-54

PRODUCT CHARACTERISTICS

Technology:	Ceramic microfilter
Filter elements:	54 pcs.
Output:	54x throughput of filter element
Working pressure:	1 to 6 bar
Water temperature:	5° C to 60° C
Capacity:	Up to 100'000 liters per filter element, depending on water quality
Dry weight:	Approx. 180 kg
Height:	1150 mm
Diameter:	750 mm
Material:	1.4404/1.4301 1.4408 (Fittings)
Article no.:	8020889 Katadyn MF-54 without filter
Article no.:	8020890 Katadyn MF-54 incl. filter no. 5





FACTS

- *99.9999% removal of bacteria
- **99.9% removal of protozoa
- High-quality stainless-steel equipment
- No removal of essential minerals
- Easy low-cost operation
- Up to 100 cleaning cycles are possible for the ceramic filter elements

*/** US Environmental Protection Agency Guide Standard and Protocol for Testing Microbiological Water Purifiers.

KATADYN MF-54


DIMENSION AND CONNECTION

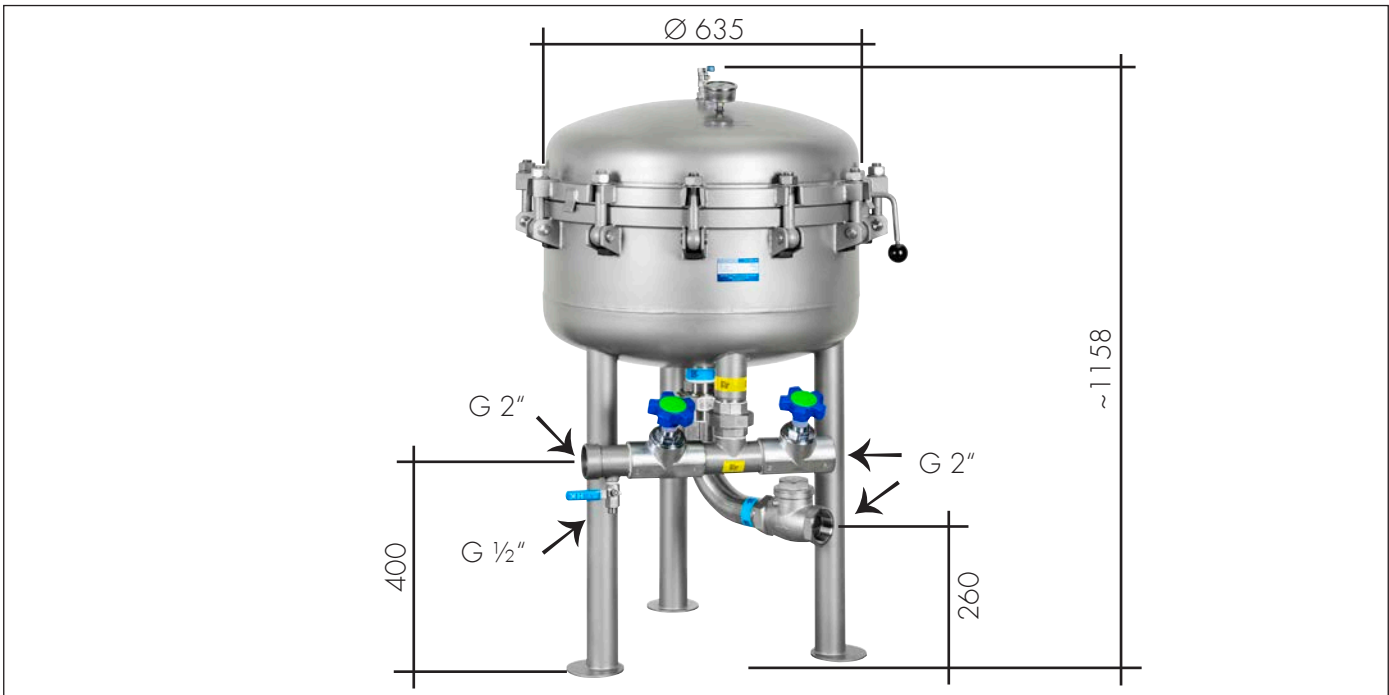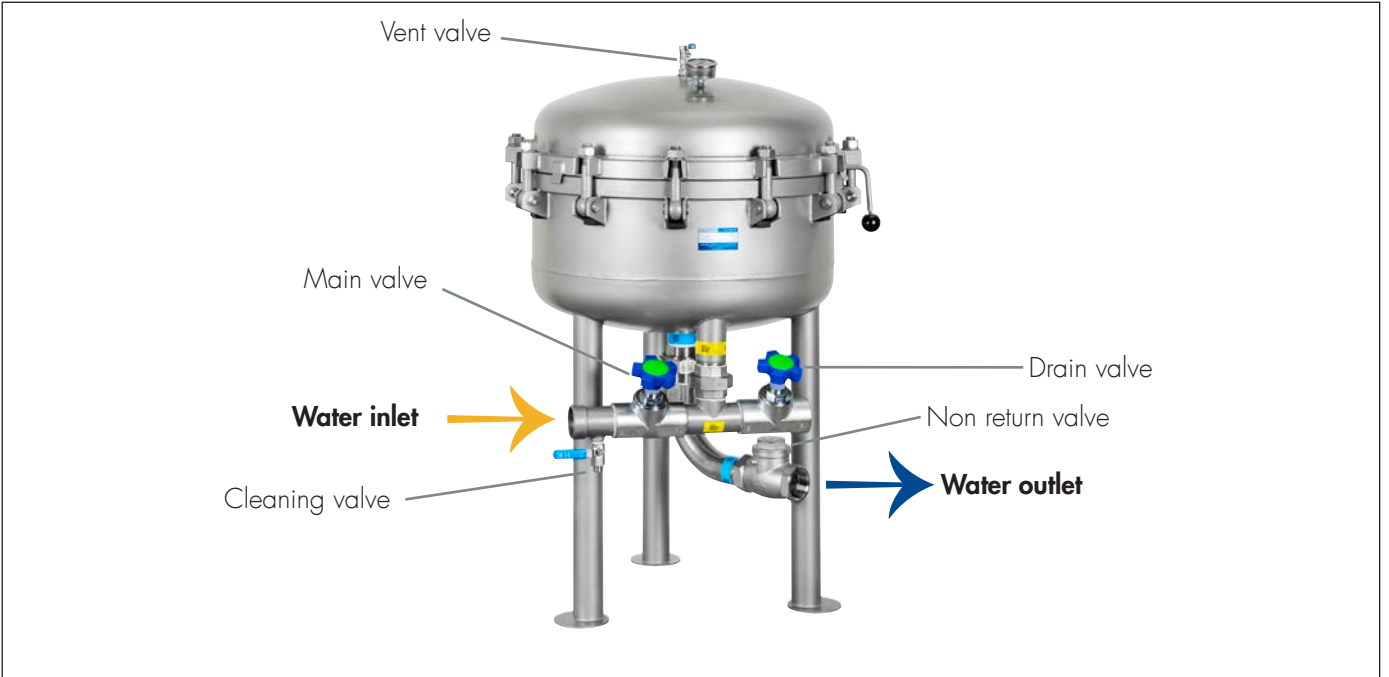

KATADYN MF-54

PERFORMANCE KATADYN MF-54 INCL. FILTER NO. 5

FLOW RATE DIAGRAM

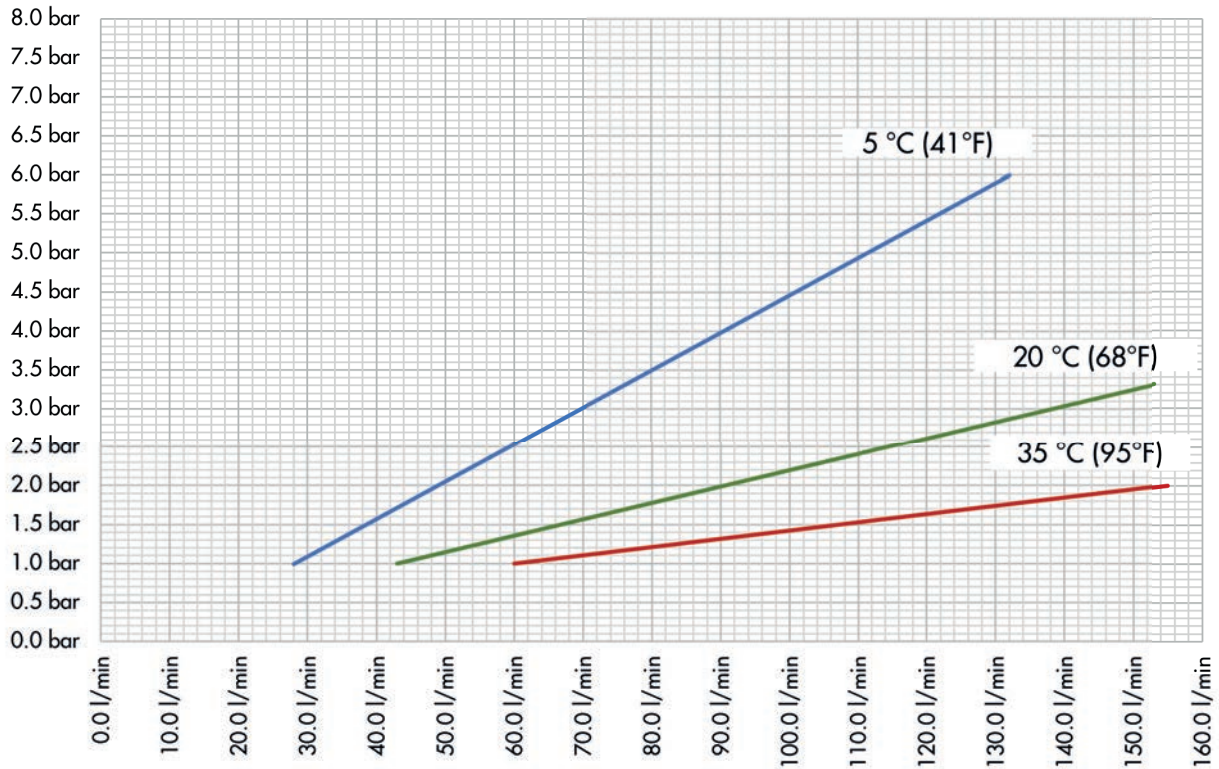

COMPATIBLE FILTER ELEMENTS

Article no. 1040	Katadyn filter element no. 4	Ceramic depth filter with permanently embedded silver 0.2 µm nom. End caps in chrome-plated brass
Article no. 1250	Katadyn filter element no. 5	Ceramic depth filter with permanently embedded silver 0.2 µm nom.
Article no. 1912	Katadyn filter element no. 55	End caps in stainless steel 1.4435
Article no. 1060	Katadyn filter element no. 6*	Ceramic depth filter 1 µm nom. End caps in chrome-plated brass *designed for coarse filtration. No removal of bacteria or protozoa.

Katadyn reserves the right to modify product characteristics.

Version: 15.01.2021

Katadyn Products Inc.

Pfäffikerstrasse 37 | 8310 Kempthal | Switzerland
 Tel: +41 44 839 21 47 | Fax: +41 44 839 21 11
 info@katadyn.com | www.katadyn.com