

# KATADYN®

MAKING WATER DRINKING WATER

**Drip Ceradyn**  
(Model #2110070)

**Drip Gravidyn**  
(Model #2110080)



GB


DE

FRA

ESP

# English

Thank you for choosing a Katadyn portable water microfiltration system. The Katadyn Drip meets industry standards for reduction of bacteria (99.9999% *Klebsiella terrigena*) and protozoan cysts (99.9% *Giardia* and *Cryptosporidium*). This free-standing gravity filter with a 10 litre water container is ideal for large quantities of water.

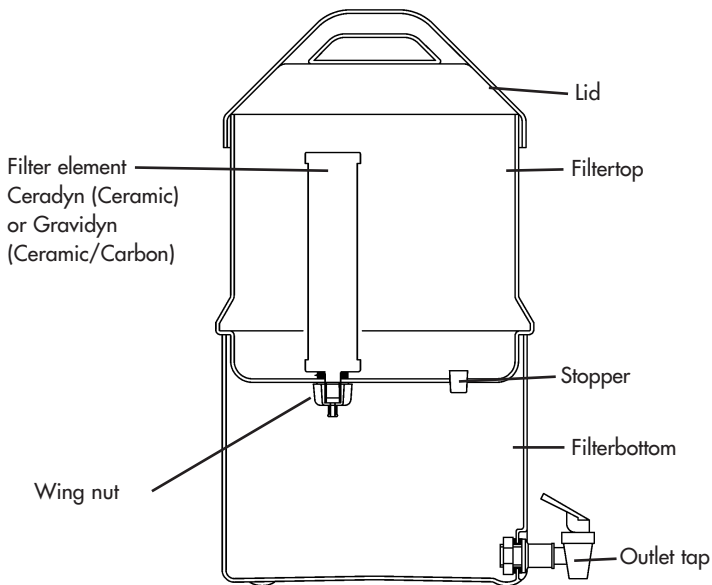

## Product Set-up

The Drip requires minimal set up. For best results, try out the Drip before first field use to familiarize yourself with its operation.

1. Rinse both plastic containers with clean water.
2. Install Katadyn filter elements and, rubber gaskets on the unfiltered water side and wing nuts on the clean water side. Wing nuts should be threaded by hand, do not over tighten.
3. Install outlet tap: Place a gasket both inside and outside of the container, tighten nut.
4. When using the Drip for the first time, discard four litres/one gallon of water to flush harmless ceramic dust from manufacturing (Ceradyn and Gravidyn) and activated carbon dust from transportation (Gravidyn).
5. To speed up the water flow, wet the filter elements in the upper plastic container. While doing so, pay attention to keep the filter outlet dry.
6. Your Drip is now ready for operation.

## Maintenance

If the filtered water flow lessens, clean the ceramic filters with the cleaning pad supplied. Do not use soap or detergents.

Check the minimum diameter after cleaning. If the measuring gauge is able to slide over the ceramic element at any point, without being forced, replace the element. Use original Katadyn ceramic elements only. After installation of new filter elements, discard the first four litres (1 gallon) of water. See point 4 of Product Set-up.

### **Katadyn Drip Gravidyn Element Replacement**

The sticker provided can be used to remind you when the filters have to be replaced. Just write on the sticker the month when the next replacement is due. If used continually for 6 months, the carbon core of the Gravidyn elements may become less effective at absorbing chemicals and taste. Katadyn suggests replacing the elements after 6 months of continuous use. If the measuring gauge is able to slide over the ceramic element at any point, without being forced, replace the element. Independent of the time used.

### **Katadyn Drip Ceradyn Element Replacement**

Use the measuring gauge to check the diameter of your Ceradyn element. It can be used as long as the gauge is unable to pass over the element at any point. The service life of your Katadyn Ceradyn Element can be up to 150,000 L (40,000 gallons), depending on the water quality.

### **Red emergency plug:**

If you need to remove a ceramic element, use the red plug to close the hole. So the Drip runs with only two filters. This allows you to use the Drip without interruption until you have obtained a new filter. The plug is for temporary use only.

For transportation, unscrew filter elements and pack them individually, to prevent damage.

## **Safety instructions**

If you will not be using your filter for an extended amount of time (longer than 2 days), let filter elements dry completely in the air.

- Clean the filter system (container and filter elements) at least once a month.
- Do not set up the Katadyn Drip filter in direct sunlight.
- If a ceramic element is cracked, replace it immediately.

Katadyn shall, in no event, be liable for any incidental or consequential damages arising from the use of or inability to use this product. Katadyn does not assume any responsibility for losses or claims by third parties which may arise through the use of this device.

## Product Registration

Please take a moment to register your new Katadyn product by completing the short productregistration form online at [www.katadyn.com/productregistration](http://www.katadyn.com/productregistration). The information you provide will enable us to better serve you with products developed to meet your needs and interests. Register your Katadyn product online and you will be automatically entered into a drawing to win a free Katadyn product.

GB

## Limited Warranty

Your Katadyn Drip filter is warranted for two (2) year from the date of purchase against defects in materials and workmanship. Should your Katadyn Drip prove defective within this period, return it to the Katadyn retailer from whom it was purchased. If you do not receive a satisfactory resolution, contact Katadyn Consumer Relations at +41 44 839 21 11 for assistance. Katadyn, at its discretion, will replace or repair the damaged item. Please retain your purchase receipt as proof of date purchased. This warranty gives you specific legal rights and you may have other legal rights which vary from state to state.

Contact International:

**Katadyn Products Inc.**

Pfäffikerstrasse 37

8310 Kempthal / Switzerland

[info@katadyn.ch](mailto:info@katadyn.ch) / [www.katadyn.com](http://www.katadyn.com)

Contact North America:

**Katadyn North America Inc.**

4830 Azelia Avenue North

Minneapolis, MN 55429 / USA

1-800-755-6701

[outdoor@katadyn.com](mailto:outdoor@katadyn.com) / [www.katadyn.com](http://www.katadyn.com)